

PREMIUM



COW (LARGE)

TRAILER SPECIFICATIONS

- Universal Mounting, Non-Skid Hot Dipped Galvanized Steel Grating Deck
- Hot Dipped Galvanized, Multiple Position Outriggers
- Traversing Axle Carriage (To Balance load Distribution)

18', 20', or 22' Trailers (DOT Compliant)

- 16,000-lb. GVWR
- 10,000-lb. Tongue Jack, Conspicuity Markings
- 5,000-lb. Leveling Jacks (4), Adjustable Safety Chains
- 25,000-lb. 2-5/16" Ball Hitch with 5,000-lb. Tongue Load (Vertically Adjustable)

- Electric Brakes, (Both Axles) With Emergency Break-Away
- Storage Boxes — Saddlebag (2), Tongue (1)
- Retractable Rear Approach Steps

22', 24', or 26' Trailers (DOT Compliant)

- 22,000-lb. GVWR
- 25,000-lb. Tongue Jack, Conspicuity Markings
- 7,000-lb. Leveling Jacks (4), Adjustable Safety Chains
- 35,000-lb Pintle Hitch with 7,000-lb. Tongue Load (Vertically Adjustable)

CONFIGURATION OPTIONS

Pneumatic Masts:

- 45' 800-lb. Payload Capacity (Proprietary Design)
- 60' 450-lb. Payload Capacity
- 76' 300-lb. Payload Capacity
- Guy Kit Included
- Protective Weather Cover Included

Generators:

- 20 Kw 1-Phase, 3-Wire, 120/240 Volt
- 26 Kw 1-Phase, 3-Wire, 120/240 Volt
- 36 Kw 1-Phase, 3 Wire, 120/240 Volt
- 56 Kw 1-Phase, 3-Wire, 120/240 Volt
- Block Heater and Battery Charger Included

Extended Run Fuel Cell:

- 24 Hour, 48 hour or As Required

Equipment Cabinets:

4-Bay, 5-Bay, 6-Bay or Custom


- U.L.[®] Listed NEMA 3R Communications Cabinet
- 150 MPH Wind Load, 150-lb/sq. ft. Snow Load, 500-lb/sq. ft. Floor Load, Zone 4 Rated
- (2) 3.5-Ton HVAC Units with Lead-Lag Controller
- Halo Ground Ring, Main Ground Bar (Exterior) Equipment Ground Bar (Interior)
- 225 AMP 42 Position 1 Phase 3-Wire Distribution Panel
- Automatic Transfer Switch with MOV/SAD Surge Protector and Appleton Receptacle
- Internal & External GFI Service Receptacles

- Flexible Equipment Mounting Options with Ceiling Mounted Ladder Rack
- Fire Extinguisher, First-Aid & Eye Wash Kit Mounted on Telco Board
- 91" or 101" OSHA Compliant Crows Nest Mast Support Structure With Boarding Ladder

Options/Add-ons:

- 1.8M Satellite Dish with Auto Acquisition Controller
- 3-Sector Antenna Mounting System
- Pan & Tilt Microwave Mount with Controller
- Mid-Level Microwave Mount
- Emergency Lighting Package, Flashers and Beacon
- High & Low Temperature Alarm, Intrusion, Smoke, Surge, Utility Power Fail and Vehicle Cab Intrusion Alarms



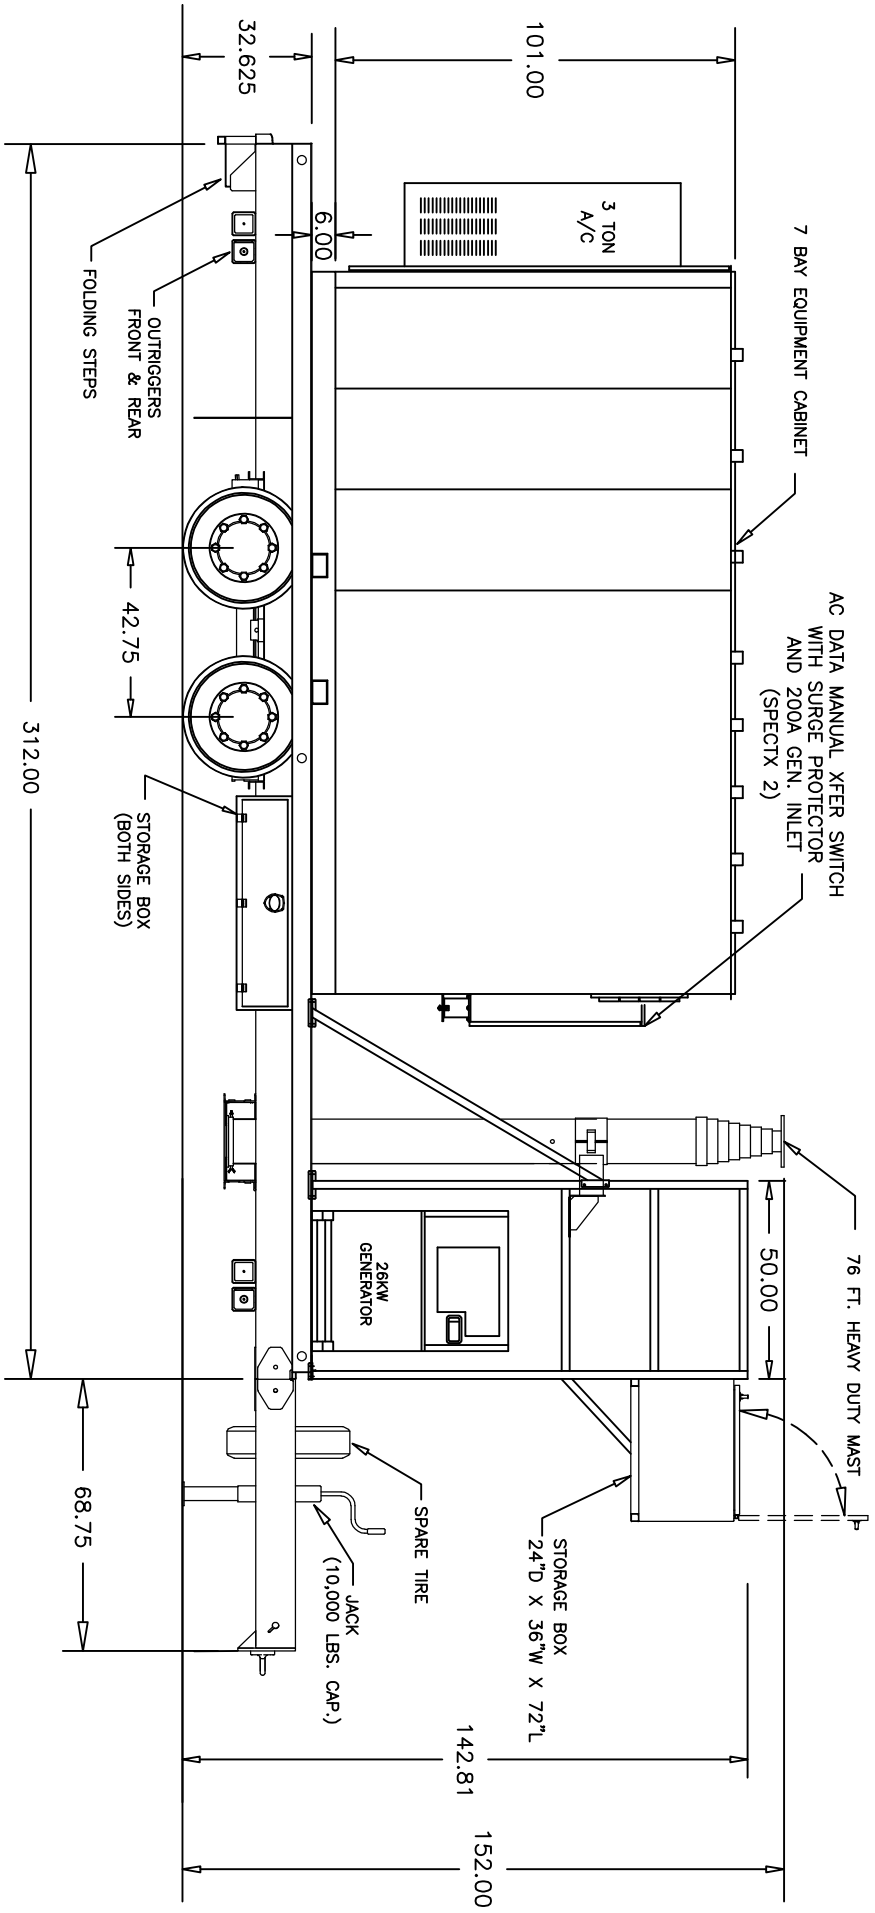

SUN WEST ENGINEERING, INC.

3802 E. BROADWAY, PHOENIX, AZ 85040 (602) 275-0882

TITLE: 26 FT. HEAVY DUTY TRAILER WITH 7 BAY GARD EQP. CABINET

CUSTOMER:

PLOTTED SCALE: .XXXX=1 SHEET: 1 of 1

DRAWN BY: *ECM* DATE DRAWN: 1-23-10

REVISED: DWG. No. SW-3250