

DISASTER RECOVERY



13' Mini-COW

TRAILER SPECIFICATIONS

- 8,000-lb. GVWR
- 5,000-lb. Tongue Jack
- 2,000-lb. Leveling Jacks (4)
- 12,000-lb. 2" Ball Hitch - Vertically Adjustable
- 205/75/R15 Tires on 15" x 6" Rims with 1/2" Studs
- Spare Tire Included
- Conspicuity Markings
- 72" OSHA Compliant Crows Nest Mast Support Structure With Boarding Ladder
- Hot Dipped Galvanized, Universal Mounting, Steel Grating Trailer Deck
- Galvanized, Multiple Position Outriggers (4)
- Electric Brakes (Both Axles) With Emergency Break-Away
- Courtesy Kit—(2) Wheel Chocks, (4) Safety Cones, (4) Jack Pads
- Aluminum Storage Cabinet with Linex® Coated Interior

CONFIGURATION OPTIONS

Pneumatic Masts:

- 30' 150-lb. Payload Capacity
- 42' 150-lb. Payload Capacity
- 45' 800-lb. Payload Capacity (Proprietary Design)
- 60' 200-lb. Payload Capacity
- 60' 400-lb. Payload Capacity
- 76' 300-lb. Payload Capacity
- Protective Weather Cover Included
- Guy Kit Included

Equipment Cabinets:

- U.L.® Listed NEMA 3R Communications Cabinet
- 150 MPH Wind Load, 150-lb/sq. ft. Snow Load, 500-lb/sq. ft. Floor Load, Zone 4 Rated
- HVAC Unit as Required
- Multiple Location R/F Entry Ports
- Flexible Equipment Mounting Options with Ceiling Mounted Ladder Rack


Optional Generators:

- 7 Kw 1-Phase, 3-Wire, 120/240 Volt
- 10 Kw 1-Phase, 3-Wire, 120/240 Volt
- 15 Kw 1-Phase, 3-Wire, 120/240 Volt
- Block Heater and Battery Charger Included
- 24 Hour Fuel Cell

Options/Add-ons:

- 3-Sector Antenna Mounting System
- Pan & Tilt Microwave Mount with Controller
- Mid-Level Microwave Mount



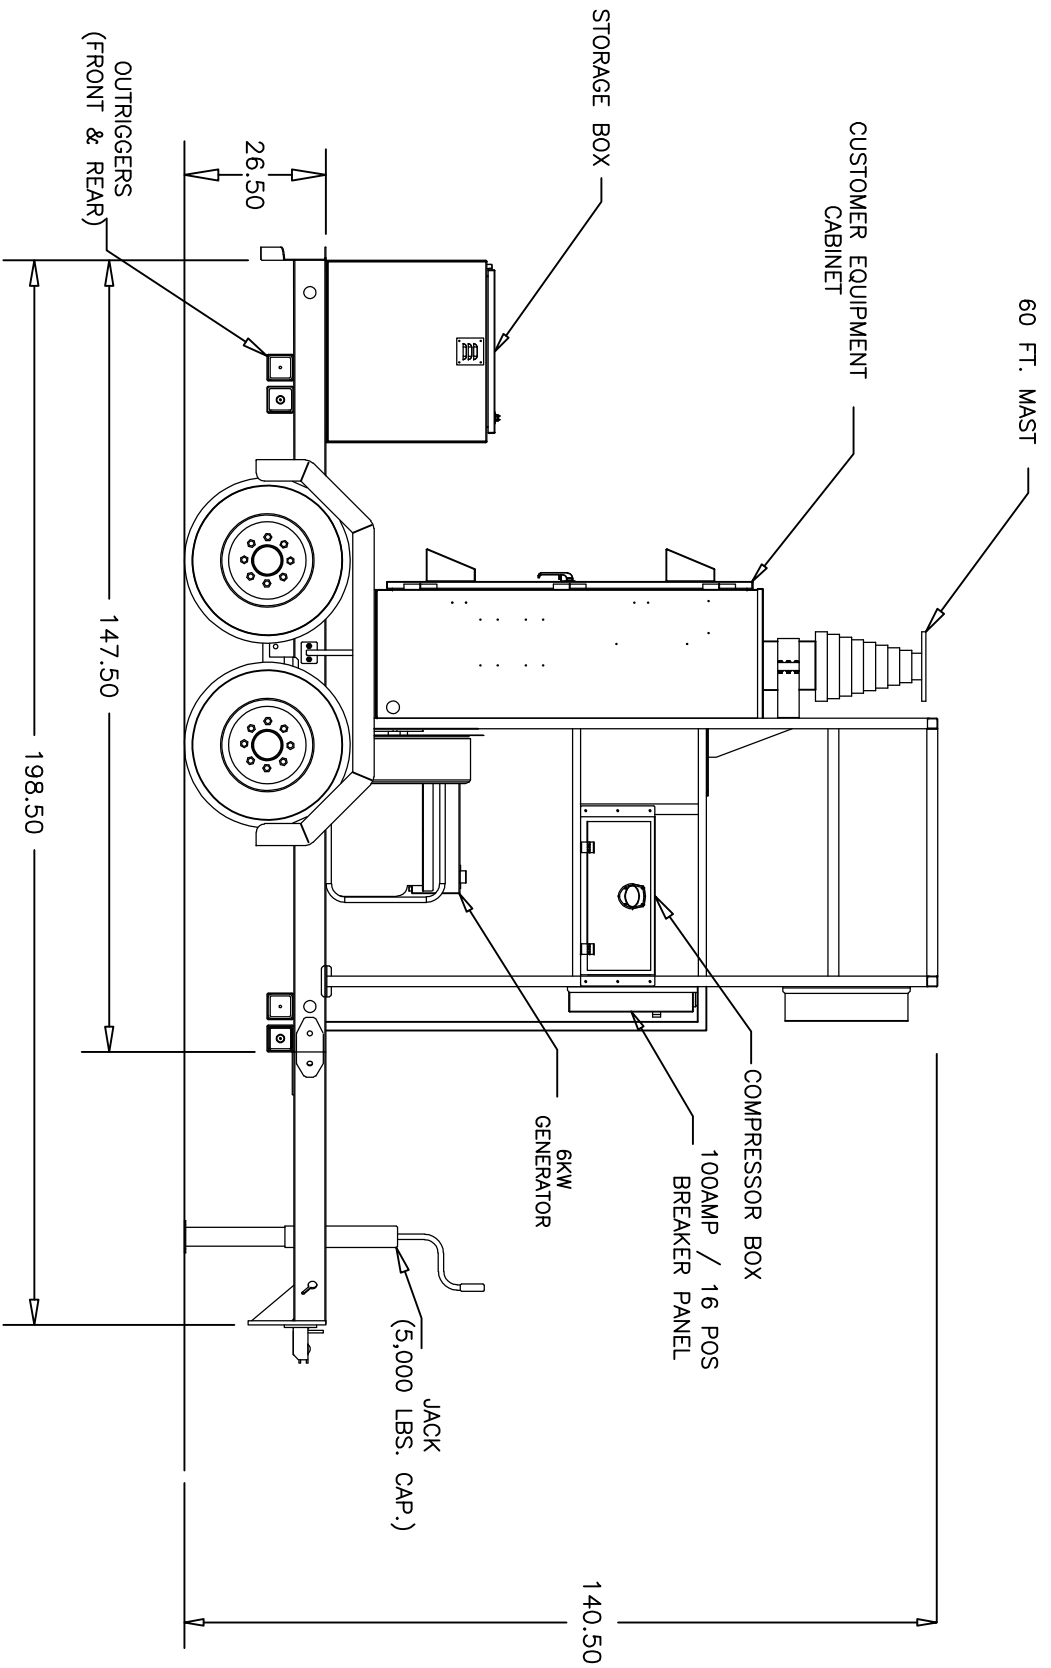

SUN WEST ENGINEERING, INC.
 3802 E. BROADWAY, PHOENIX, AZ. 85040 (602) 275-0882

TITLE: 13' EQUIPMENT TRAILER

CUSTOMER:

PLOTTED SCALE: .XXXX=1 SHEET: 1 of 1

DRAWN BY: *AVCF* DATE DRAWN: 6-22-09

REVISED: 12-3-10 DWG. No. SW-3119