

PREMIUM



Non-CDL COLT

TRUCK SPECIFICATIONS

- International 4300 SBA 4X2 32,000-lb GVW de-rated to 26,000-lb GVW
- EPA Compliant 260 HP 660 lb-ft Torque Diesel Engine with Block heater
- 12,000-lb Front Axle with 12,000-lb Suspension, 16-Ply H-Rated Tires
- 21,000-lb Rear Axle with 23,500-lb Suspension with 4,500-lb Auxiliary Over-load Springs, 16-Ply H-Rated Tires
- Allison 2500-RDS 5-Speed Automatic Transmission
- Body Builder Circuits for OEM Integration
- Dual 50-Gallon Aluminum Fuel Tanks
- Air Brakes
- Premium Base Coat/Clear Coat Paint
- Premium Interior Trim Package Includes; Cruise Control, Tilt Steering, Air Conditioning AM/FM/CD Satellite-Ready Stereo
- Powder coated Bumper, Steps, Battery box, Mirror C-loop's & Air tanks
- Cab-Mounted Work Lights

COLT SPECIFICATIONS & OPTIONS

Bed Frame and Accessories:

- Fully Galvanized, Custom Manufactured Bed Frame with LED Lighting
- (4) Stabilizing Outriggers with 7,000-lb Jacks
- (2) Large Storage/Tool Boxes with Basic Tool Set Included

Mast:

- (2) 60' Pneumatic Heavy Duty Locking, with Rotating Base, 450-lb Capacity
- 20 sq. ft. Sail, 60 MPH Wind Load
- Guy Kit Included
- Protective Weather Cover

Generator:

- 20 Kw Diesel (Auto Start)
- 1 Phase 120/240 Volt 82 Amp
- Block Heater and Battery Charger Included

Equipment Cabinet: 6 or 7-Bay

- U.L.® Listed NEMA 3R Communications Cabinet
- 150 MPH Wind Load, 150-lb/sq. ft. Snow Load, 500-lb/sq. ft. Floor Load, Zone 4 Rated
- (2) 3.5-Ton HVAC Units with Lead-Lag Controller
- Halo Ground Ring, Main Ground Bar (Exterior) Equipment Ground Bar (Interior)
- 225 AMP 42 Position 1 Phase 3-Wire Distribution Panel
- Automatic Transfer Switch with MOV/SAD Surge Protector and Appleton Receptacle
- R/F Entry Port, Interior & Exterior GFI Service Receptacles
- Flexible Equipment Mounting with Ceiling Mounted Ladder Rack
- Telco Entrance with Interior Telco Board
- Fire Extinguisher, First-Aid and Eye Wash Kit Mounted on Telco Board
- Cab-Mounted Work Lights


- High & Low Temperature Alarm, Intrusion, Smoke, Surge, Utility Power fail and Vehicle Cab Intrusion Alarms

Options/Add-ons:

- 1.8M Satellite Dish with Auto Acquisition Controller
- 45' 800-lb Capacity Mast in-lieu of 60' Mast
- 76' Mast in-lieu of 60' Mast
- 100-Gal Auxiliary Fuel Tank with Fuel Transfer System and Low Fuel Alarm
- 3-Sector Antenna Mounting System
- Pan & Tilt Microwave Mount with Controller
- Mid-Level Microwave Mount
- Emergency Lighting Package, Flashers and Beacon
- Manual Transfer Switch in-lieu of Auto Transfer Switch




SUN WEST
ENGINEERING, INC.

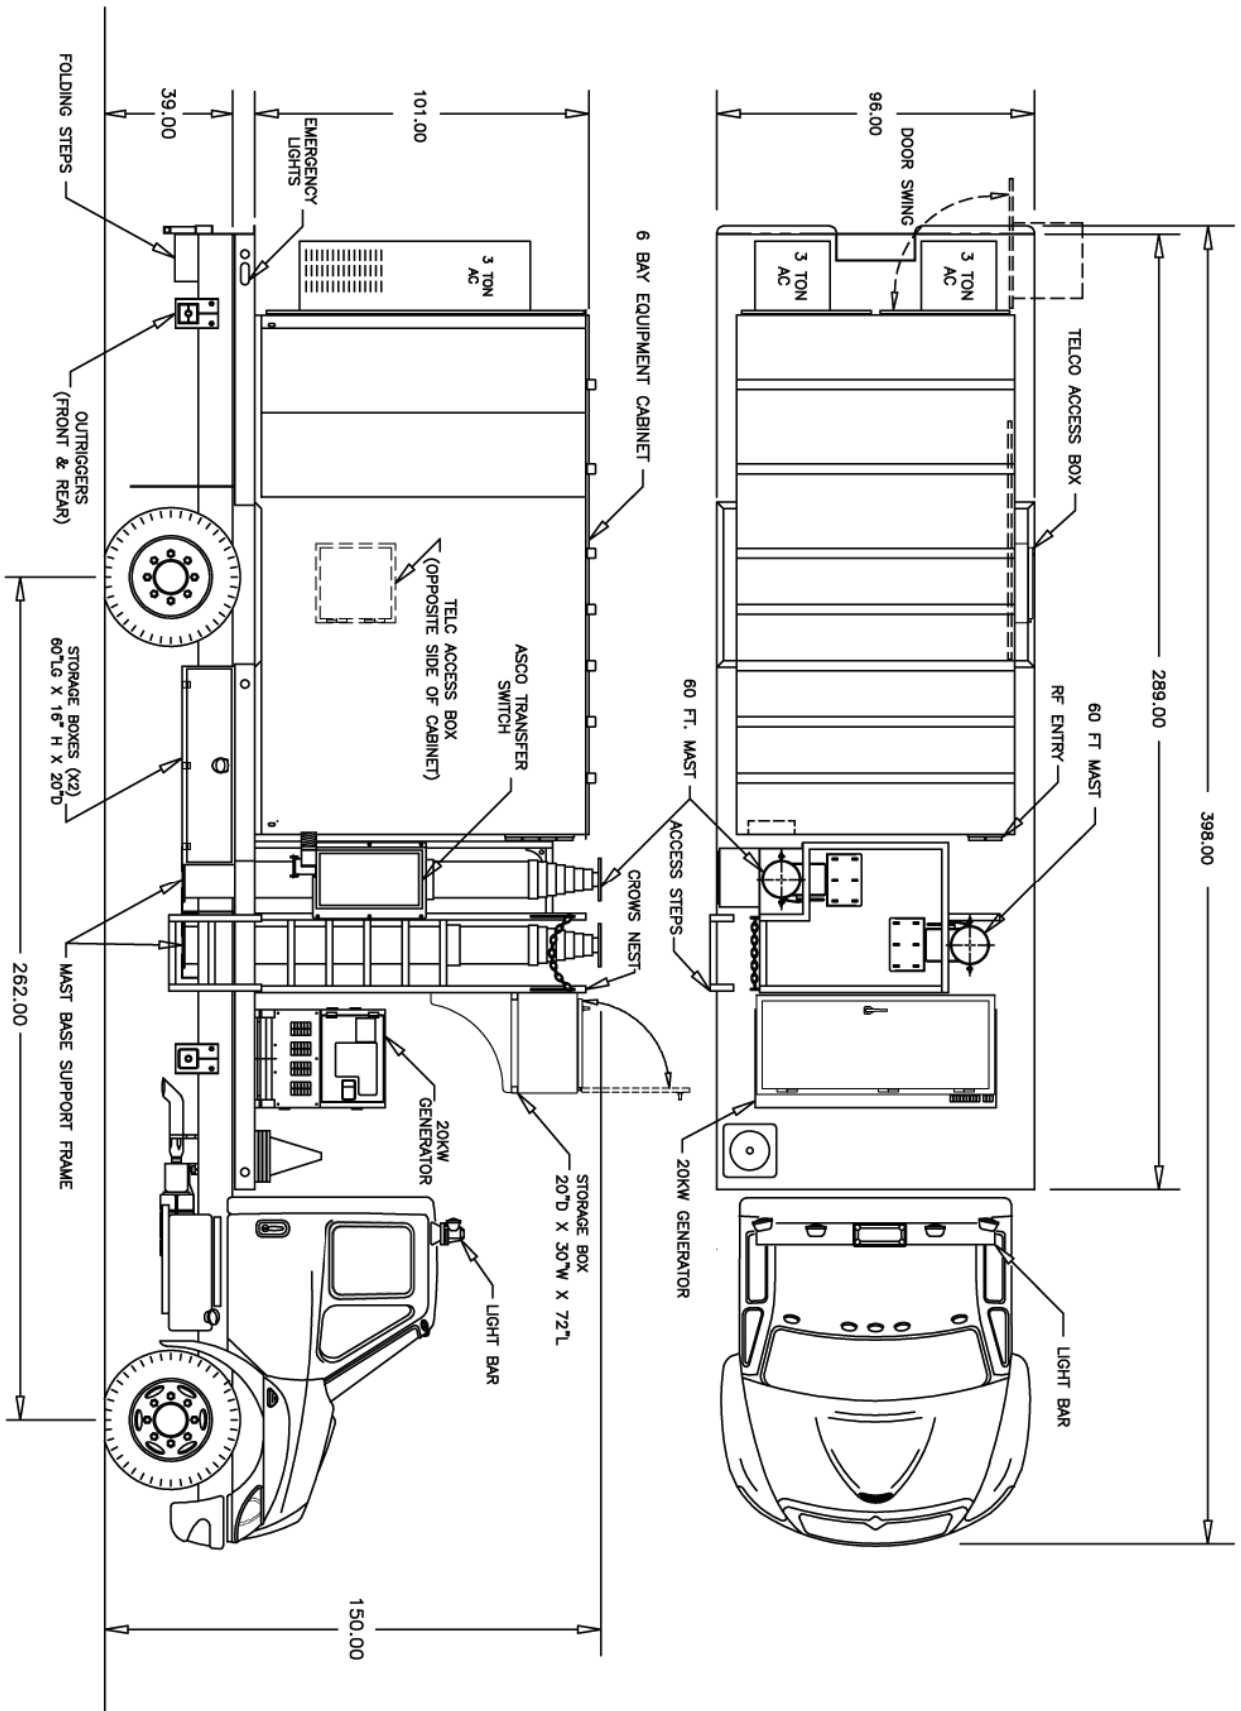

PROPRIETARY PROPOSAL

*** PROPRIETARY AND CONFIDENTIAL ***
 THIS DOCUMENT AND THE INFORMATION
 HEREIN IS THE SOLE PROPERTY OF
 SUN WEST ENGINEERING, INC.
 DUPLICATION OF THIS INFORMATION WITHOUT
 PRIOR CONSENT OF SUN WEST ENGINEERING
 IS FORBIDDEN.

		SUN WEST ENGINEERING, INC. <small>5812 E. BROADWAY, PHOENIX, AZ 85040 (602) 978-0082</small>	
		TITLE: INTERNATIONAL (MODEL 4300) TRUCK "COW W/ 6 BAY CABINET"	
PLOTTED SCALE: XXXX=1	SHEET: 1 of 1	DATE DRAWN:	DWG. No.: SW-3556
DRAWN BY: AZJW			
REVISED:			

