

COTS Commercial Grade 1U Rackmount Computer System

MILITARY | INDUSTRIAL | COMMERCIAL



C112 Family

Models C11201, C11207, C11208, C11213

*Assembled in the USA
ISO 9001:2008 Certified
ITAR Registered*

Our C112 computing platform can be used for many computationally-intensive applications, while taking limited rack space. With the added security of sturdy construction, this system has revision controlled, long-life components that provide stability for long program duration.

Specifications for our standard products can always be customized to fit your unique application requirements.

In-house Engineering
Department

Rapid Prototyping

CPU Options

- Single Intel® Xeon® E3 Series
- Single Intel® Core i5® or i7®

Drive Capacity

- 1(x) 3.5" Internal Drive Bay
- 1(x) Slim Slot Optical Drive

Applications

- Aviation
- Broadcast
- Energy
- Telemetry
- Diagnostics
- Simulation
- C4ISR
- Communications
- Imaging
- Persistent Surveillance
- Public Safety
- Automation
- Test and Measurement
- Transportation
- Medical



Benefits

- Revision-Controlled Components
- Long-Life Components
- Optimal for Long Program Life Cycles
- Excellent Value over Program Life
- Variety of Expansion Slots Available

Environments

Components meet the below specifications.

HIGH TEMPERATURE

50°C Operational, 85°C Storage

LOW TEMPERATURE

0°C Operational, -20°C Storage

Contact us today!
858.571.4330 or saleseng@chassisplans.com
www.chassis-plans.com

COTS Commercial Grade 1U Rackmount Computer System

MILITARY | INDUSTRIAL | COMMERCIAL

Chassis Specifications

DIMENSIONS

19" X 1.75" X 16" (482.6mm X 44.5mm X 406.4mm)

WEIGHT

17 pounds, weight varies by configuration

ENCLOSURE FEATURES

Construction

Heavy duty, cold-rolled electroplated steel

Front Door

Single door with 1(x) thumb screw

Drive Capacity

1(x) 3.5" internal drive bay

1(x) slim slot optical drive

Indicators

Power on, hard drive access

Switches

System power, system reset switches

FRONT USB PORTS

(2x) ports USB 2.0

SYSTEM COOLING

(3x) 40mm x 28mm cooling fans

MOTHER BOARD CAPACITY

Designed for ATX-sized motherboard (9.6" X 12")

POWER SUPPLY



Single or redundant 400W 110/220 Volt AC

Other power options available

C112 Photos



I/O connectors are dependent upon the model selected. See specifications for details.

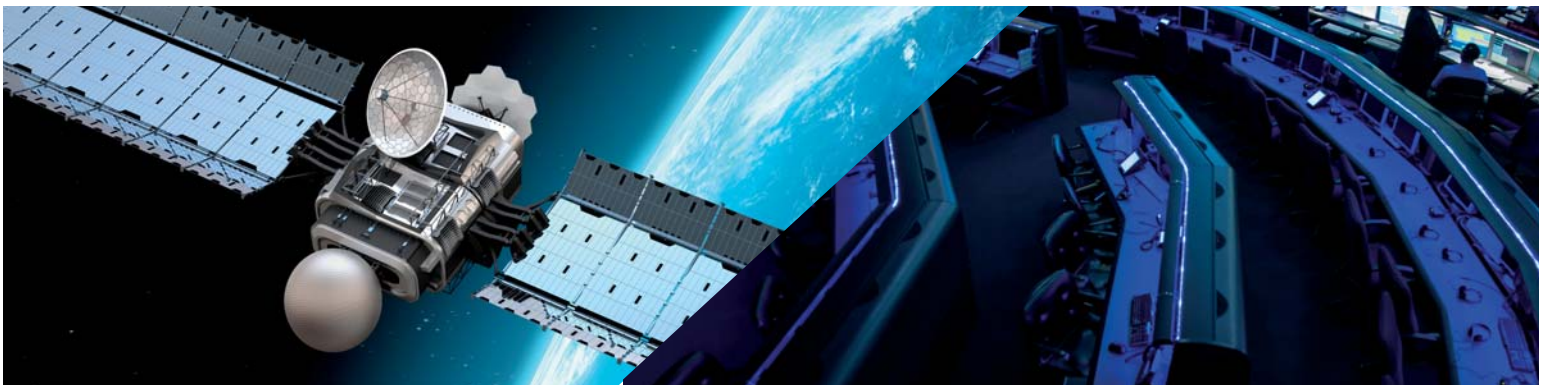

Computer Specifications

	C11201	C11207	C11208	C11213
CPU	Single Intel® Core i7®-860, 2.80GHz OR Single Intel® Core i5®-660, 3.33GHz	Single Intel® Core™ i7-3770 (8M Cache, up to 3.9GHz), Intel® Core™ i5-3550S (6M Cache, up to 3.7GHz), Single Intel® Core™ i7-2600 Processor (8M Cache, 3.4GHz) OR Single Intel® Core™ i5-2400 Processor (6M Cache, 3.1GHz)	Single Intel® Xeon® Processor E3-1275 (8M Cache, 3.4GHz) OR Single Intel® Xeon® Processor E3-1225 (6M Cache, 3.1GHz)	Single Intel® Core i7-4770S 3.9GHz OR Single Intel® Core i5-4570S 3.6GHz
CHIP SET	Intel® Q57 Platform Controller Hub (PCH)	Intel® Q67 Platform Controller Hub (PCH)	Intel® C216 Platform Controller Hub (PCH)	Intel® Q87 Express
MAX RAM	(4x) 240-pin DDR3 Max. 16GB	(4x) 240-pin DDR3 Max. 32GB	(4x) 240-pin DDR3 Max. 32GB	(4x) 240-pin DDR3 Max. 32GB
HARD DRIVES	Up to (1x) SATA2, 500GB, 7200 RPM, 64GB cache standard. In fixed configuration.	Up to (1x) SATA2, 500GB, 7200 RPM, 64GB cache standard. In fixed configuration.	Up to (1x) SATA2, 500GB, 7200 RPM, 64GB cache standard. In fixed configuration.	Up to (1x) SATA2, 500GB, 7200 RPM, 64GB cache standard. In fixed configuration.
RAID OPTION	JBOD	JBOD	JBOD	JBOD
OPTICAL DRIVE	Slim Slot-Fed 8x DVDRW	Slim Slot-Fed 8x DVDRW	Slim Slot-Fed 8x DVDRW	Slim Slot-Fed 8x DVDRW
EXPANSION SLOTS	(1x) PCIe x16 (GEN 2.0)	(1x) PCIe x16 (GEN 3.0)	(2x) PCIe x16 (GEN 3.0)	(1x) PCIe x16 (GEN 3.0)
REAR I/O	(2x) PS/2 ports, (2x) DB-9 RS232 serial ports, (1x) DVI-I port (DVI-D signal only), (1x) DB-15 VGA port, (2x) RJ45 LAN ports, (4x) USB 2.0/1.1 ports, (1x) Mic-in, (1x) line-in and (1x) line out	(1x) mini-DIN-6 port for PS/2 mouse/keyboard, (2x) DB-9 RS232 serial ports, (1x) DVI-I port (DVI-D signal only), (1x) DB-15 VGA port, (2x) RJ45 LAN ports, (6x) USB 2.0/1.1 ports, (1x) Mic-in, (1x) line-in and (1x) line out	(1x) mini-DIN-6 port for PS/2 mouse/keyboard, (1x) DB-9 RS232 serial port, (2x) DVI-I ports (DVI-D signal only) & (1x) HDMI port, (2x) RJ45 LAN ports, (4x) USB 3.0 ports, (2x) USB 2.0 ports, (1x) Mic-in, (1x) line-in and (1x) line out	(1x) PS/2 ports, (2x) DB-9 RS232 serial ports, (1x) DVI-I port (DVI-D signal only), (1x) HDMI Port, (2x) RJ45 LAN ports, (4x) USB 3.0 ports, (2x) USB 2.0 ports, (1x) Mic-in, (1x) line-in and (1x) line out
ON BOARD GRAPHICS	Intel® HD Graphics	Intel® HD Graphics	Intel® HD Graphics 4000P	Integrated Intel® HD Graphics DVI-I Out (DVI-D only) HDMI
AUDIO	Realtek® ALC262 Stereo ADCs and S/PDIF Interface	Realtek® ALC886 5.1-channel High Definition Audio	Realtek® ALC886 5.1-channel High Definition Audio	Realtek® ALC886 5.1 High Definition Audio
LAN	(1x) Realtek® RTL8111DL PCI Express Gigabit Ethernet controller and (1x) Intel® W82578DM with iAMT6.0 Gigabit Ethernet PHY	(1x) Intel® WG82579LM with iAMT7.0 Gigabit Ethernet Phy & (1x) Intel® WG82574L PCI Express Gigabit Ethernet controller	(1x) Intel® WG82579LM with iAMT8.0 Gigabit Ethernet Phy & (1x) Intel® WG82574L PCI Express Gigabit Ethernet controller	Intel I210 PCI Express Gigabit Ethernet controller, Intel I217LM with iAMT9.0 Gigabit Ethernet Phy
O/S	Windows XP® Pro, Windows 7® Pro, 32 & 64-bit Other O/S Available	Windows XP® Pro, Windows 7® Pro, 32 & 64-bit Other O/S Available	Windows XP® Pro, Windows 7® Pro, 32 & 64-bit Other O/S Available	Windows XP® Pro, Windows 7® Pro, 32 & 64-bit Other O/S Available

Who We Are

CHASSIS PLANS

- Chassis Plans designs, fabricates and integrates standard and customized high-performance computing platforms and LCD monitors for military, industry, and commercial applications.
- Using COTS components, Chassis Plans provides solutions for customers who need reliable systems that will operate in a variety of harsh conditions and who require revision control and hardware consistency for multi-year programs.
- Chassis Plans is an ITAR Registered and SBA-certified small business that has been operating in Southern California for over a decade.

ENGINEERED TO YOUR SPECIFICATIONS

- In-house engineering department
- Design and build of rapid prototypes. Experience with solving difficult customer application problems through knowledge of the industry and custom system design and manufacturing capability
- Our Engineers use Solid Works 3D CAD modeling software for mechanical design and thermal simulation
- Design experience with MIL-STD-167, MIL-STD-461, MIL-STD-810, and MIL-S-901, in addition to FCC, UL, CE, and country specific agency requirements

YOUR CONFIGURATION. ONE PART NUMBER.

- It's our mission to make your life easier. Our Sales Engineers will help you select the right configuration for your project, making sure the details are analyzed and that the system meets your specifications.
- One part number means easier procurement and less paperwork for you.
- Dedicated Sales and Program Managers.
- Last time buy opportunities for end-of-life components.

FACILITY AND TEST

- All integration work is performed in a state-of-the-art, ESD-controlled facility
- Our facility has 23,000 sqft and has dedicated 12,000 sqft to manufacturing and 3,000 sqft to engineering
- Operate to anti-static standard ANSI/ESD S20.20-2007 and electronics assembly standard IPC-A-610, Revision E-2010

QUALITY COUNTS

- ISO 9001:2008 Certified
- 100% system inspection before shipment
- All integrated systems undergo a minimum 24-hour system test and burn-in before shipment to the customer
- Assistance with 3rd party verification of system specifications
- 2-year warranty on all integrated systems and LCD monitor products
- Assembled in the USA



Contact us today!
858.571.4330 or saleseng@chassisplans.com
www.chassis-plans.com

Chassis Plans

10123 Carroll Canyon Road · San Diego, CA 92131

©2014 Chassis Plans LLC. All Rights Reserved. No part of this document may be copied or reproduced without prior consent.

C112-0415